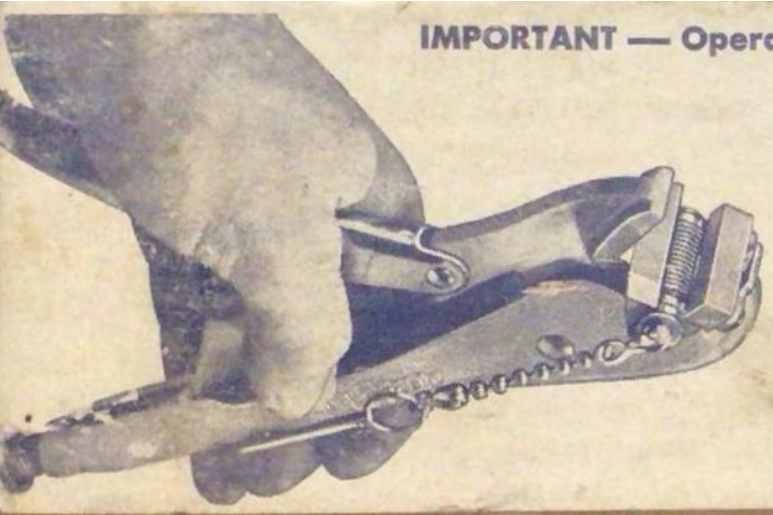

IMPORTANT — Operator Should Have These Directions

DIRECTIONS FOR OPERATING

Hold handles in left hand with open jaws of Lacer in upward position. (See picture.) Place required number of hooks in Lacer. (Use one more hook in one end of tape than in the other.) Insert retainer pin. Remove paper by pinching from points of hooks. After squaring both ends, insert tape between points of hooks (equalizing distance from end hooks to edges of tape). Hold end of tape firmly against Brass Hook Retainer until hooks have started to enter; then both hands can be used to squeeze handles until jaws are fully closed.

Clipper Belt Lacer Co., Grand Rapids 2, Michigan